



640 Gbit/s and 1.28 Tbit/s polarisation insensitive all optical wavelength conversion

Hu, Hao; Palushani, Evarist; Galili, Michael; Mulvad, Hans Christian Hansen; Clausen, Anders; Oxenløwe, Leif Katsuo; Jeppesen, Palle

Published in:
Optics Express

Link to article, DOI:
[10.1364/OE.18.009961](https://doi.org/10.1364/OE.18.009961)

Publication date:
2010

Document Version
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

Citation (APA):
Hu, H., Palushani, E., Galili, M., Mulvad, H. C. H., Clausen, A., Oxenløwe, L. K., & Jeppesen, P. (2010). 640 Gbit/s and 1.28 Tbit/s polarisation insensitive all optical wavelength conversion. *Optics Express*, 18(10), 9961-9966. <https://doi.org/10.1364/OE.18.009961>

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

640 Gbit/s and 1.28 Tbit/s polarisation insensitive all optical wavelength conversion

Hao Hu*, Evarist Palushani, Michael Galili, Hans Christian Hansen Mulvad, Anders Clausen, Leif Katsuo Oxenløwe, and Palle Jeppesen

DTU Fotonik, Department of Photonics Engineering, Technical University of Denmark, Ørsted's Plads, Building 343, DK-2800 Kgs. Lyngby, Denmark

*huhao@fotonik.dtu.dk

Abstract: We report the first demonstration of polarisation insensitive all-optical wavelength conversion (AOWC) for single wavelength channel 640 Gbit/s return-to-zero differential-phase-shift-keying (RZ-DPSK) signal and 1.28 Tbit/s polarisation multiplexed (Pol-Mux) RZ-DPSK signals using a 100-m polarisation-maintaining highly nonlinear fiber (PM-HNLF) in a polarisation diversity loop configuration. The AOWC is based on four-wave mixing in PM-HNLF. Error free performance is achieved for the wavelength converted signals. Less than 0.5 dB polarisation sensitivity is obtained.

©2010 Optical Society of America

OCIS codes: (060.2330) Fiber optics communications; (190.4370) Nonlinear optics, fibers; (230.7405) Wavelength conversion devices.

References and links

1. B. Metcalfe, "Toward Terabit Ethernet", OFC 2008, San Diego (USA), plenary talk.
 2. R. Derksen, G. Lehmann, C. Weiske, C. Schubert, R. Ludwig, S. Ferber, C. Schmidt-Langhorst, M. Moller, and J. Lutz, "Integrated 100 Gbit/s ETDM Receiver in a Transmission Experiment over 480 km DMF," Optical Fiber Communication Conference, 2006, OFC 2006, Paper PDP37.
 3. H. Hu, H. Mulvad, M. Galili, E. Palushani, A. Clausen, L. Oxenløwe, and P. Jeppesen, "Polarisation-insensitive 640 Gbit/s demultiplexing using a polarisation-maintaining highly non-linear fibre," Photonics in Switching 2009, paper Fr11-2, Pisa, Italy.
 4. H. C. Hansen Mulvad, L. K. Oxenløwe, M. Galili, A. Clausen, L. Gruner-Nielsen, and P. Jeppesen, "1.28 Tbit/s single-polarisation serial OOK optical data generation and demultiplexing," Electron. Lett. **45**(5), 280–281 (2009).
 5. H. G. Weber, S. Ferber, M. Kroh, C. Schmidt-Langhorst, R. Ludwig, V. Marembert, C. Boerner, F. Futami, S. Watanabe, and C. Schubert, "Single channel 1.28 Tbit/s and 2.56 Tbit/s DQPSK transmission," Electron. Lett. **42**(3), 178–179 (2006).
 6. H. C. H. Mulvad, M. Galili, L. K. Oxenløwe, H. Hu, A. T. Clausen, J. B. Jensen, C. Peucheret, and P. Jeppesen, "Demonstration of 5.1 Tbit/s data capacity on a single-wavelength channel," Opt. Express **18**(2), 1438–1443 (2010), <http://www.opticsinfobase.org/oe/abstract.cfm?URI=oe-18-2-1438>.
 7. Y. Liu, E. Tangdionga, Z. Li, H. de Waardt, A. M. J. Koonen, G. D. Khoe, X. Shu, I. Bennion, and H. J. S. Dorren, "Error-Free 320-Gb/s All-Optical Wavelength Conversion Using a Single Semiconductor Optical Amplifier," J. Lightwave Technol. **25**(1), 103–108 (2007).
 8. H. Hu, H. Suche, R. Ludwig, B. Huettl, C. Schmidt-Langhorst, R. Nouroozi, W. Sohler, and C. Schubert, "Polarization insensitive all-optical wavelength conversion of 320 Gb/s RZ-DQPSK data signals," Optical Fiber Communication Conference, OFC 2009, San Diego, California, U.S.A., Paper OThS6.
 9. A. Bogoni, and I. Xiaoxia Wu, Fazal, and A. Willner, "320 Gb/s nonlinear operations based on a PPLN waveguide for optical multiplexing and wavelength conversion," Optical Fiber Communication Conference, OFC 2009, San Diego, California, U.S.A., paper OThS5.
 10. M. Galili, L. Oxenløwe, H. Mulvad, A. Clausen, and P. Jeppesen, "Optical Wavelength Conversion by Cross-Phase Modulation of Data Signals up to 640 Gb/s," IEEE J. Sel. Top. Quantum Electron. **14**(3), 573–579 (2008).
 11. M. Galili, H. Mulvad, L. Gruner-Nielsen, J. Xu, L. Oxenlowe, A. Clausen, and P. Jeppesen, "640 Gbit/s optical wavelength conversion using FWM in a polarisation maintaining HNLF," presented at the ECOC 2008, Brussels, Belgium, paper Tu.3.D.5.
 12. H. Sotobayashi, W. Chujo, and T. Ozeki, "Inter-wavelength-band conversions and demultiplexings of 640 Gbit/s OTDM signals," Optical Fiber Communication Conference, OFC 2002, paper WM2.
 13. H. Hu, E. Palushani, M. Galili, H. Mulvad, A. Clausen, L. Oxenløwe, and P. Jeppesen, "1.28 Tb/s Wavelength Conversion for Polarisation Multiplexed RZ-DPSK Signals," Optical Fiber Communication Conference, OFC 2009, San Diego, California, U.S.A., paper OWP1.
-

1. Introduction

The concept of 1 Tbit/s Ethernet envisioned to carry the future Internet traffic has been proposed recently [1], spurred on by the continuous growth of the Internet. With the introduction of the 1 Tbit/s Ethernet, all the network techniques such as switching and routing on such high bit rates become quite challenging. Currently, the 107 Gbit/s electronic signal processing technique based on electrical time division multiplexing (ETDM) is state-of-the-art [2], and it will be very difficult to realize electronic signal processing approaching 1 Tbit/s in the near future. On the other hand, all-optical signal processing techniques based on optical time division multiplexing (OTDM) have shown the potential for high-speed signal processing on 640 Gbit/s and beyond [3–6].

Wavelength conversion is a key network functionality in future high-speed optical network, which can resolve the packet contention by transmitting at an alternate wavelength through the same route, resulting in identical latency and packet sequence. A number of wavelength conversion technologies have been proposed, and among them all-optical wavelength conversion (AOWC) offers advantages over optical-electrical-optical (O/E/O) schemes such as high signal bandwidth (far beyond 100 Gbit/s), potential low power consumption, simultaneous conversion of several WDM or TDM channels as well as transparency to data rate and modulation format.

AOWC has been demonstrated using different nonlinear media such as semiconductor optical amplifiers (SOA), periodically poled Lithium Niobate (PPLN) waveguides, or highly nonlinear fibers (HNLF). The AOWC using a SOA has been demonstrated up to 320 Gbit/s, based on a filtered cross phase modulation (XPM) induced chirp [7]. The AOWC using PPLN waveguides has been demonstrated up to 320 Gbit/s based on either cascaded second harmonic and difference frequency generation (cSHG/DFG) [8] or cascaded sum frequency generation (SFG) and DFG [9]. AOWC using a HNLF has been shown to work at 640 Gbit/s and 1.28 Tbit/s, either using filtered XPM-induced chirp [10] or four wave mixing (FWM) [11–13].

Polarisation insensitivity is also an important feature for AOWC in system applications. Although most of the nonlinear media are inherently polarisation dependent, polarisation insensitive AOWC can be achieved with polarisation diversity operation. Most recently, polarisation insensitive 320 Gbit/s AOWC based on a Ti:PPLN waveguide has been demonstrated using the polarisation diversity scheme [8].

In this paper, we report the first demonstration of polarisation insensitive AOWC for a 640 Gbit/s return-to-zero differential-phase-shift-keying (RZ-DPSK) signal and a 1.28 Tbit/s polarisation multiplexed (Pol-Mux) RZ-DPSK signal, using a 100-m polarisation-maintaining HNLF (PM-HNLF) in a polarisation diversity loop configuration. The AOWC is based on FWM in PM-HNLF. Error free performance is achieved for the wavelength converted signals. Less than 0.5 dB polarisation sensitivity is also obtained. To the best of our knowledge, this is the highest operation speed of a polarisation insensitive wavelength converter reported to date.

2. Operation principle

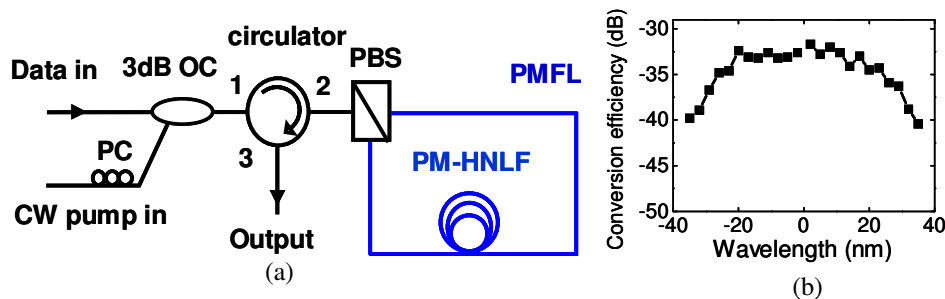


Fig. 1. (a) Polarisation-maintaining fibre loop (blue lines indicate the PMF), (b) FWM conversion efficiency dependence on wavelength detuning

(2^7-1) maintaining and polarisation maintaining. The FWHM of the data and DEMUX control pulses are 560 fs and 920 fs, respectively. For the generation of a single wavelength 1.28 Tbit/s Pol-Mux RZ-DPSK signal, the 640 Gbit/s DPSK signals are polarisation-multiplexed using a polarisation-maintaining 3-dB coupler and a polarisation beam combiner.

In the AOWC the generated 640 Gbit/s RZ-DPSK signal or the 1.28 Tbit/s Pol-Mux RZ-DPSK signal is amplified by an EDFA, then filtered by a 13 nm OBF and finally launched into the PMFL through a 3 dB optical coupler (OC). The average signal power is 22.9 dBm at the input of the circulator. The CW pump light at 1545 nm is amplified by an EDFA, filtered by a 1.3 nm OBF and launched into the PMFL through the second input of the 3 dB coupler. The pump power is 21.8 dBm at the input of circulator. The pump polarisation is adjusted for equal power in both directions of the loop; therefore, the pump power at the input of the PM-HNLF for each direction is only 18 dBm which is below the Stimulated Brillouin Scattering (SBS) threshold of 21 dBm. The wavelength converted signal together with the original signal and the CW pump are sent out at port 3 of the circulator and then launched into a filter subsystem, which consisted of a 20-nm OBF, a fiber Bragg grating (FBG) based notch filter and an EDFA in between. The notch filter is used to block the pump light, and the OBF is used to separate the converted signal at 1534 nm from the original data signal.

The wavelength converted 640 Gbit/s RZ-DPSK signal or 1.28 Tbit/s Pol-Mux RZ-DPSK signal is detected by the receiver which consists of a polarisation demultiplexer (Pol. Demux), a NOLM demultiplexer and a 10 Gbit/s DPSK receiver. The 1.28 Tbit/s Pol-Mux RZ-DPSK signal is separated by the Pol. Demux (polarisation beam splitter) into two 640 Gbit/s polarisation components (TM mode and TE mode). The following NOLM is then used to OTDM demultiplex the single polarisation 640 Gbit/s data down to a 10 Gbit/s data signal. The NOLM operation is based on cross-phase modulation (XPM) in a 15-m HNLF. Finally, the demultiplexed 10 Gbit/s RZ-DPSK signal is demodulated and detected using a delay interferometer and a balanced photodetector in the 10 Gbit/s DPSK receiver.

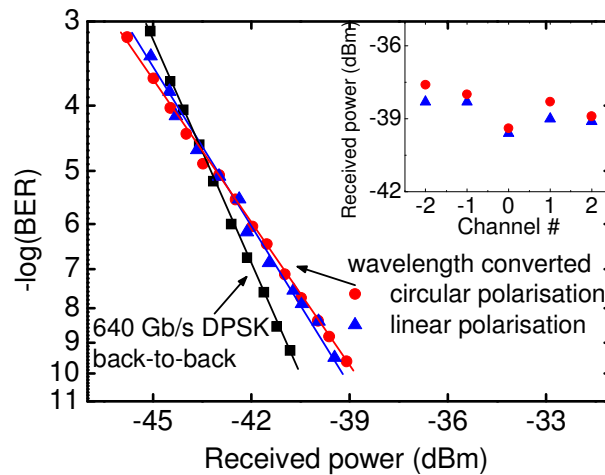


Fig. 3. BER measurements for the 640 Gbit/s RZ-DPSK signal back-to-back, and for the wavelength converted 640 Gbit/s RZ-DPSK signal with input SOP being circular polarisation or linear polarisation.

The AOWC for the 640 Gbit/s RZ-DPSK signal is obtained by skipping the Pol. Mux and Pol. Demux stages. The state of polarisation (SOP) of the 640 Gbit/s RZ-DPSK signal is monitored by a polarisation analyzer at the input of the AOWC. Figure 3 shows the results of the bit error rate (BER) measurements for the 10 Gbit/s DPSK channels demultiplexed from the wavelength converted 640 Gbit/s RZ-DPSK signals with input SOP being circular polarisation or 90° linear polarisation, together with the 640 Gbit/s RZ-DPSK back-to-back case. The AOWC causes about 1.5-dB power penalty at the BER of 10^{-9} compared with the

back-to-back case, which is mainly due to the different receiver sensitivities at 1534 nm and 1556 nm. The different slopes of the two BER curves also mainly come from the wavelength difference. In order to demonstrate the polarisation insensitive characteristics of the AOWC, we vary the SOP at the input of the AOWC and observed the BER performance for the different input SOPs. The results indicate that for the input SOP being circular or linear the difference in the receiver sensitivity is almost negligible (less than 0.5 dB). The inset shows the receiver sensitivity at BER of 10^{-9} for five adjacent channels with circular or linear polarisation. Error free performance is achieved for all the channels with a spread of ~ 2 dB. To characterize the residual polarisation sensitivity, we measured the power of the wavelength converted signal versus time (1 s) while scrambling the polarisation in front of the AOWC with a scan rate of 5 Hz. The maximum fluctuations for both single polarisation 640 Gbit/s signal [Fig. 4 (a)] and Pol. Mux 1.28 Tbit/s signal [Fig. 4 (b)] are less than 0.5 dB.

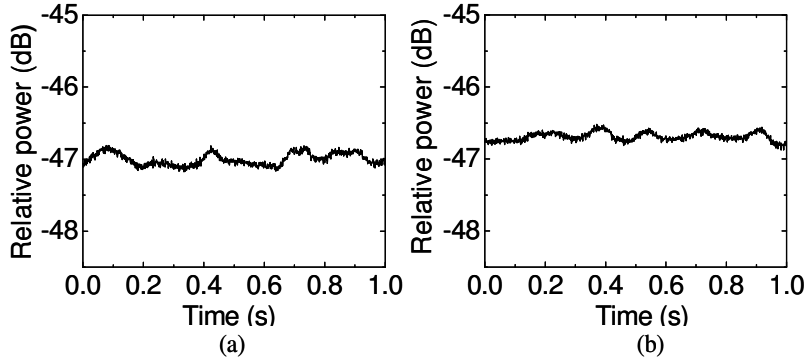


Fig. 4. (a) and (b): Power fluctuations of the wavelength converted single polarisation 640 Gbit/s signal and the Pol. Mux 1.28 Tbit/s signal with polarisation scrambling.

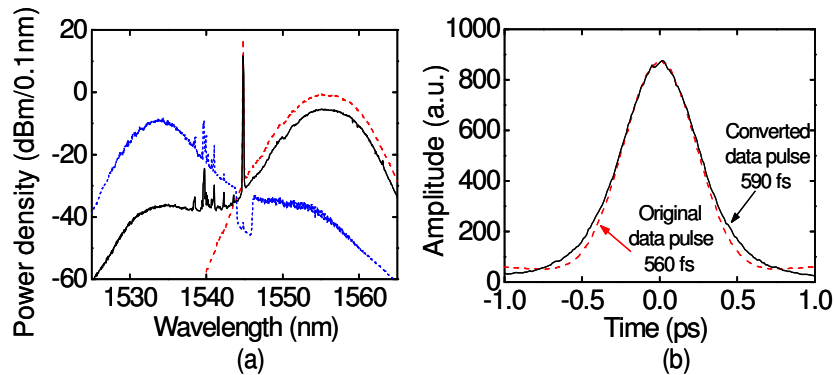


Fig. 5. (a) Spectra at input (red dash) and output (black solid) of the PMFL, and the wavelength converted 1.28 Tbit/s Pol-Mux RZ-DPSK signal (blue short dash); (b) Autocorrelations of original data pulse (dashed) and converted data pulse (solid line).

In the experiment with the 1.28 Tbit/s AOWC, the spectrum at the input and output of the PMFL is shown in Fig. 5(a). The FWM conversion efficiency is -31 dB and it could be improved by using higher CW pump power. If the pump power is higher than SBS threshold, a simple scheme with phase modulation of the pump can suppress the SBS but will also distort the phase of the wavelength converted signal. In this case, an advanced phase modulation scheme might be necessary. The spectrum of the wavelength converted 1.28-Tbit/s Pol-Mux RZ-DPSK signal is also shown in Fig. 5(a). The residual peaks are due to the XPM on the CW pump from the original data signal. The autocorrelation traces of the original data pulse and the wavelength converted data pulse are shown in Fig. 5(b). Compared with

original data pulse (FWHM of 560 fs) the wavelength converted data pulse is slightly broadened to a FWHM of 590 fs, which is mainly due to filtering effect in the filter subsystem. The BER measurements are shown in Fig. 6(a) as a function of the received power. BER curves are plotted for the 10 Gbit/s DPSK channels demultiplexed from the 1.28 Tbit/s Pol-Mux RZ-DPSK signals back to back (TM and TE), and the converted 1.28 Tbit/s Pol-Mux RZ-DPSK signals (TM and TE). The wavelength conversion causes about 1 dB power penalty at the BER of 10^{-9} compared with the back to back case (unconverted signal). The inset shows the receiver sensitivity at BER of 10^{-9} for five adjacent channels. Error free performance is achieved for all the channels (TM and TE) with a spread of ~ 3 dB. The 10 Gbit/s eye-diagrams of the converted, demultiplexed and demodulated signals in TM and TE polarisation are shown in Fig. 6(b). The eye-diagrams indicate that the wavelength converted signals of TM and TE have almost identical performance.

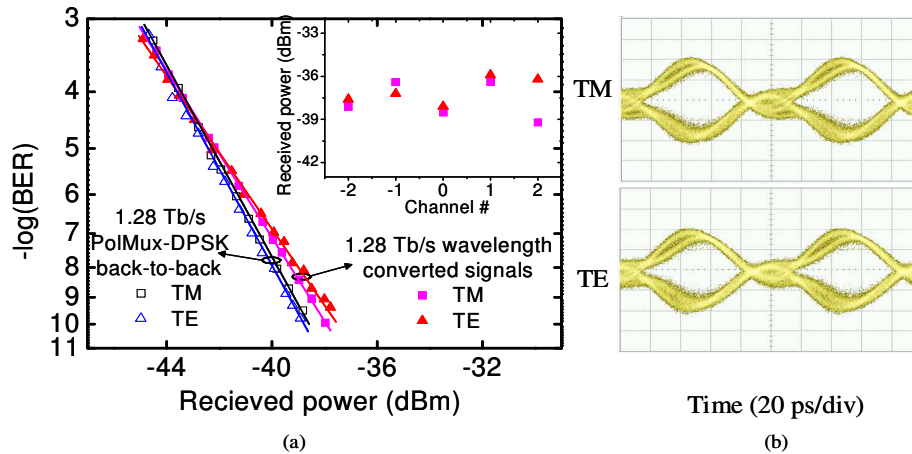


Fig. 6. (a) BER measurements for the 10 Gbit/s DPSK channels demultiplexed from the 1.28-Tbit/s Pol-Mux RZ-DPSK signals back to back, and the wavelength converted 1.28-Tbit/s Pol-Mux RZ-DPSK signals (TM and TE). (b) 10 Gbit/s eye-diagrams of the converted, demultiplexed and demodulated signals in TM and TE polarisation.

4. Conclusion

We have demonstrated polarisation insensitive wavelength conversion for a single wavelength channel 640 Gbit/s RZ-DPSK signal and a 1.28 Tbit/s Pol-Mux RZ-DPSK signal using a 100-m PM-HNLF in a polarisation diversity scheme. Less than 0.5 dB polarisation sensitivity is obtained. Error free operations for both the wavelength converted 640 Gbit/s RZ-DPSK signal and the wavelength converted 1.28 Tbit/s Pol-Mux RZ-DPSK signal are achieved. We also investigated the characteristics of the polarisation insensitive AOWC. The results show that a FWM conversion efficiency of -31 dB is obtained with a CW pump power of 18 dBm and the 3-dB conversion bandwidth is 50 nm. The BER measurements and eye-diagrams show that the TM and TE polarisations of the wavelength converted 1.28 Tbit/s Pol-Mux RZ-DPSK signal have almost identical performance.

Acknowledgments

We would like to thank the Danish Research Council for supporting the project NOSFERATU (Non-linear optical switching for extremely high data rate communications) and OFS Fitel Denmark Aps for kindly providing the PM-HNLF.